



SNÁKORNĚNÍ POHLED  
DEVELOPMENT VIEW

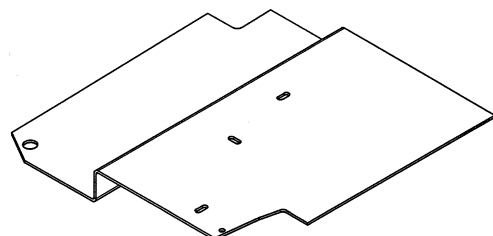

SNÁKORNĚNÍ  
PICTORIAL VIEW





DETAIL A  
SCALE 12  
TYPICAL 3 PLACES

STAV DODÁNÍ:  
BEZ OTRŽEPÍ  
BEZ NASTVOTY

# PŘEKLAD

date: 25 -11- 2016

PROVEDL/A  
JANA PROKEŠOVÁ

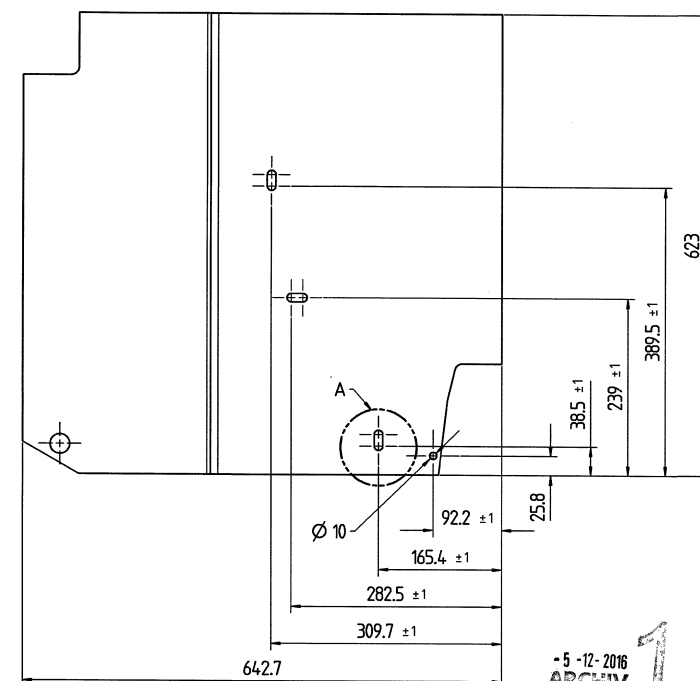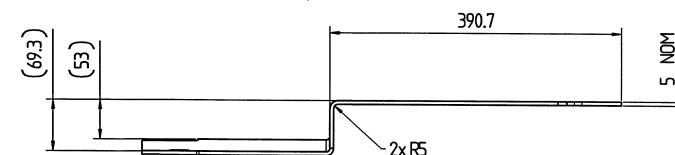

First angle projection	01	State was RFQ	STAV BYL RFQ	TB834		
General tolerance (GT) in mm	Index alteration Change no. Fit Toler.					
Size range	Inspection dim. Auxiliary dim. Date Name					
≤ 30	30 - 120	120 - 400	400 - 1000	19.05.2016	PLMIG	Blank no.
≤ 30	120	400	1000	25.05.2016	G. Selik	Title
Condition at time of delivery				Material: BS EN 10025 S275R		
de-scaled (degree of purity SA 2.12 acc. ISO 8501-1)				Weight: 16.2		
without burrs acc. WN 11310				Prod. Scale 15		
Permissible top-end rounding during flame cutting (also positive bead acc. WN 10572)				Title: floorplate		
oil-free / free of grease				Drawing number: 14.014.312311		
oiled				Sheet: 1 of 1		
oiling permissible				Confidential document		
Indicate the required condition at time of delivery with an X				Refer to protection notice ISO 14001		
Languages: EN				Released		

- 5 -12- 2016  
ARCHIV

14/16/012.18