

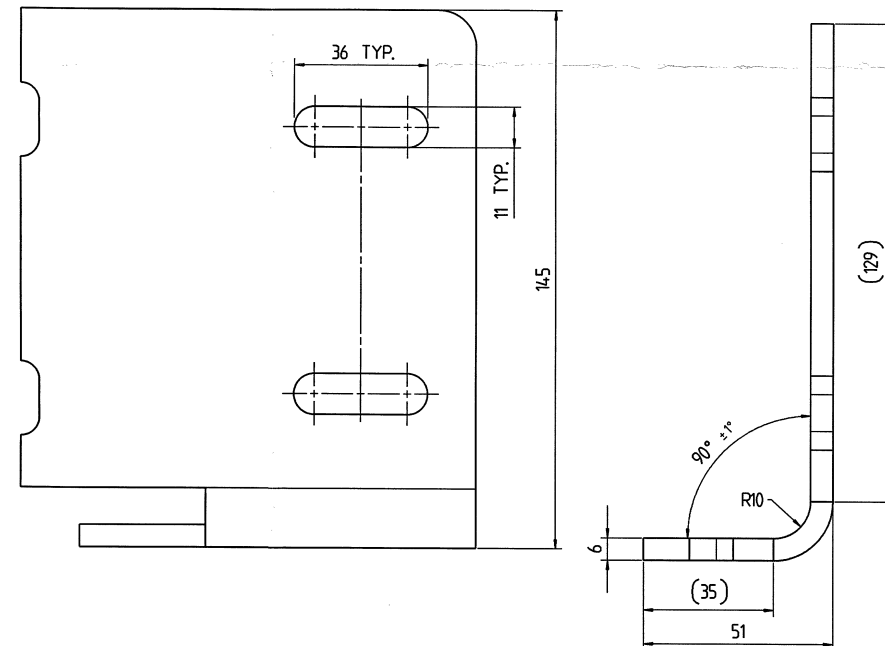


PŘEKLAD

dne: 12-05-2016

PROVEDL/A
JANA PROKEŠOVÁ

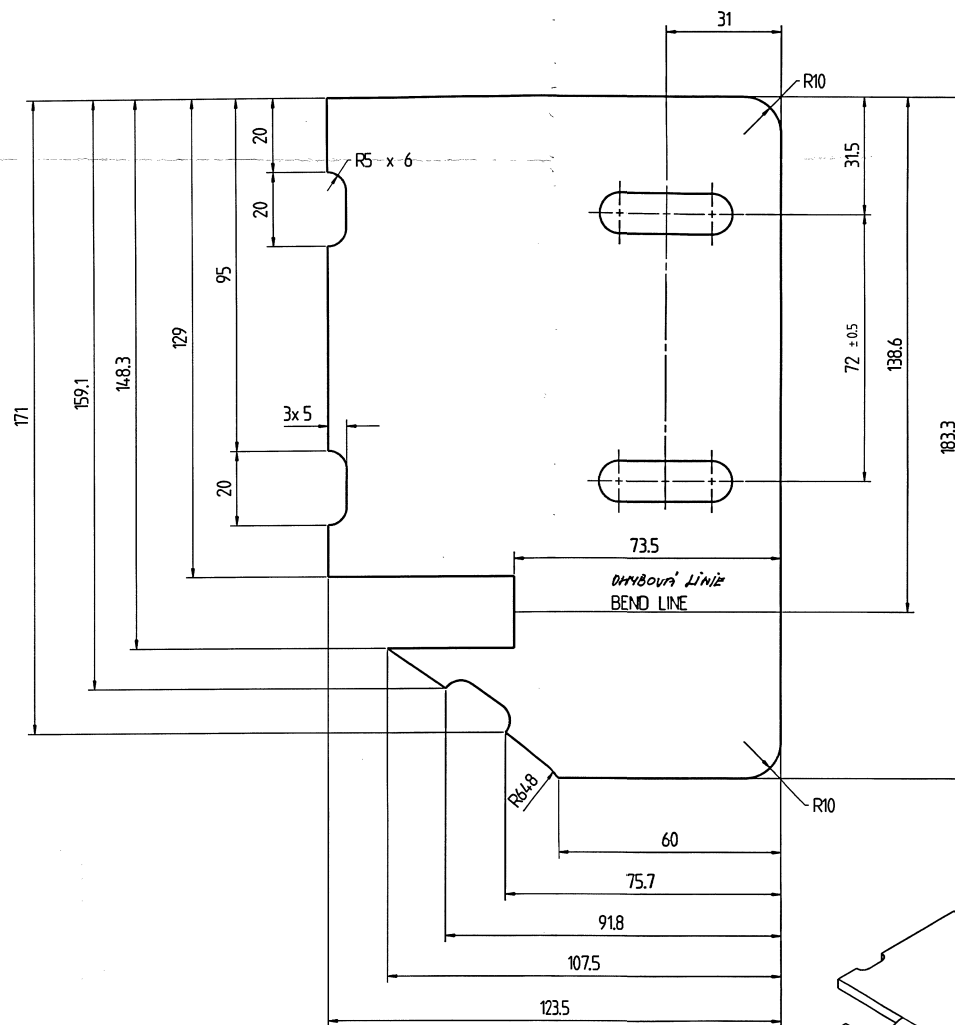

Pictorial View

OBRAZOVÝ POHLED

STAV ZODPĚVNÍ:
ZEM OTŘEP
ODHRAŠTĚNÍ

Condition at time of delivery	
de-scaled (degree of purity SA 2 1/2 acc. ISO 8501-1)	—
without burrs acc. WN 1130	x
Permissible top-end rounding during flame cutting (also positive bead acc. WN 10572)	—
oil-free / free of grease	x
oiled	—
aging permissible	—
Indicate the required condition at time of delivery with an X.	

24/16/00518

First angle projection		01	State was RFO	STAV BYL ZP	T48032				
General tolerance (GT) in mm		Inspection dim.							
Size range		Auxiliary dim.							
≤ 30	30	≤ 120	120	400	1000				
GT coarse									
L	1	2	2	3	4				
Lengths (L) and angle (L) ± GT									
Tolerance Symbols ISO 1101									
roundness	—								
straightness/flatness	—								
concentricity/run out	—								
symmetry	—								
parallelism	—								
position	—								
Confidential document									
Refer to protection notice ISO 1006									

13-05-2016
ARCHIV



Material: BS EN 10025 S275JR

Blank no:

Title:

support STEP MOUNT

PROD. Scale

Sheet: 1

of: 1

14015712020

Released