
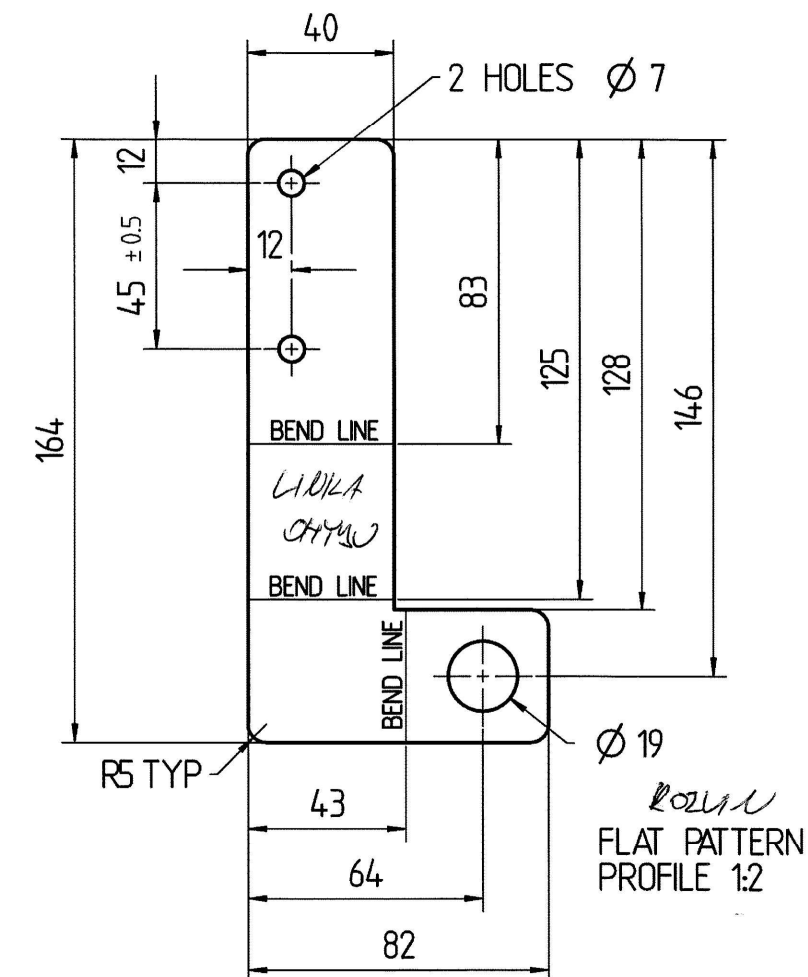
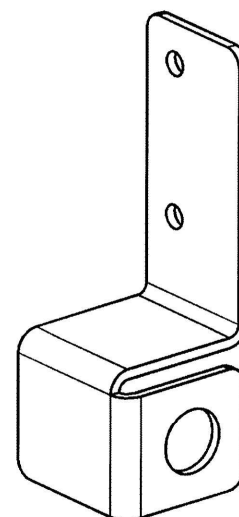


PŘEKLAD

dne: 07. 02. 2014  
 V100214  
 PROVEDL/A

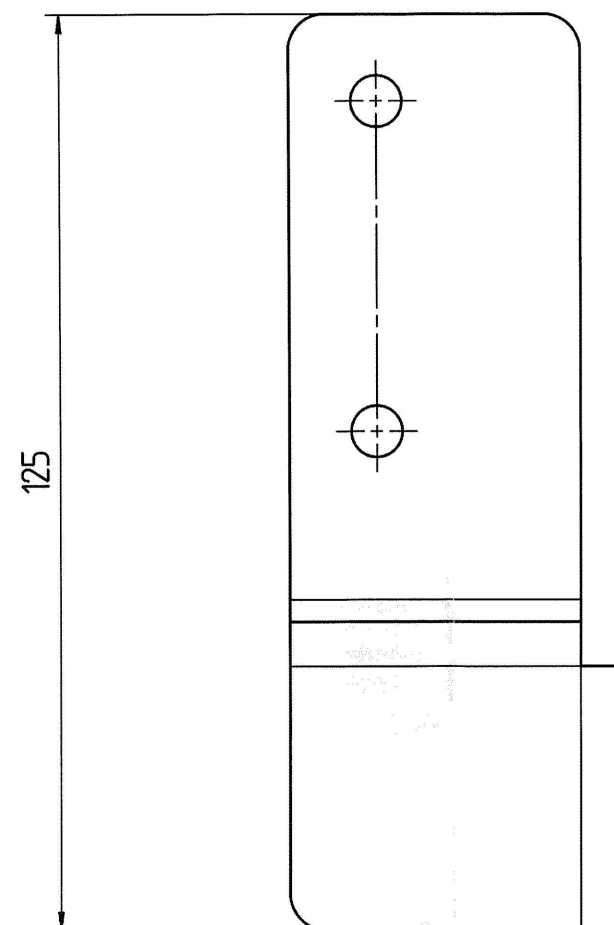

18-02-2014

ARCHIV

NZ 14/00009

Paint according to WN 11500					
Type of paint	Short code	RAL	Colour-shade	Unit of gloss	Inciden.
Primer	2-K-G	3009 HR RA	red oxide		
Top coat	2-K-L	7021 HR RA	dark grey	30	60°
Single coat paint					
Powder paint					
KTL-coat					
Heat resistance paint					

First angle projection	00	T34632			
General tolerance (GT) in mm					
Size range	Index	alteration	Change no	Fit	Toler.
> 30 > 120 > 400 > 1000 ≤ 30 ≤ 120 ≤ 400 ≤ 1000	Inspection dim.	Auxillary dim.			
GT coarse	Date	Name	Material:	Blank no:	Weight: in kg
L 1 2 3 4 1 2 4 6	6.6.2011	G.Selkirk	BS 1449 CR4 3 THK		0.18
Lengths (L) and angle (L/Δ) = ± GT	Checked	6.6.2011	G.Selkirk	Title:	UPA
Tolerance Symbols ISO 1101	Auth'd	6.6.2011	G.Selkirk	bracket	Scale
○ roundness = 1/20-Tol. -□ straightness/flatness = GT ◎ concentricity/run out = GT ≡ symmetry = GT // parallelism = GT ⊕ position = GT	M.check	6.6.2011	G.Selkirk	elec socket	1:1
Languages:					1:2
en	Confidential document				Sheet:
	Refer to protection notice ISO 16016				1
					of:
					1

Approved

14013630109d001

A3