



Pos.	Description	Spec.	Part-No.
Basic torch (complete)			
1	ABIMIG® AT 155-C LW; central plug KZ-2; 3,0m; T45G X125 Y70 ST0,8		006.D837.1
4	ABIMIG® AT 155-C LW; central plug KZ-2; 4,0m; T45G X125 Y70 ST0,8		006.D838.1
8	ABIMIG® AT 155-C LW; central plug KZ-2; 5,0m; T45G X125 Y70 ST0,8		006.D839.1
Combi torch (Torch without neck and consumables)			
1	ABIMIG® ATG 155 LW; central plug KZ-2; 3,0m		006.D813.1
4	ABIMIG® ATG 155 LW; central plug KZ-2; 4,0m		006.D814.1
8	ABIMIG® ATG 155 LW; central plug KZ-2; 5,0m		006.D815.1
1	ABIMIG® ATG 155 LW; UNI-Plug UP4M; 3,0m		006.D816.1
4	ABIMIG® ATG 155 LW; UNI-Plug UP4M; 4,0m		006.D817.1
8	ABIMIG® ATG 155 LW; UNI-Plug UP4M; 5,0m		006.D818.1
1	ABIMIG® ATG 155 LW; UNI-Plug UP4M; 5,0m		006.D819.1
Torch neck			
1	Torch neck ABIMIG® AT 155-C T; 45G X125 Y70		006.D834.1
4	Spacer	5 pcs	767.D607.5
8	Cap nut M22x1,5		014.H279.1
9	Protection cap (divided) D=14 for cap nut	10 pcs	014.H281.10
Handle			
11.1	Handle ABIMIG® AT cpl. with long trigger and blind cover		180.D077.1
11.2	Handle ABIMIG® AT cpl. with short trigger and blind cover		180.D078.1
11.3	Trigger long 2-pole		185.D118.1
11.4	Trigger short 2-pole		185.D120.1
11.5	Blind cover		400.D573.1
15	Torch mount M22x1,5 / M10x1		014.H354.1
17	Half ring D=37	2 pcs	400.D561.2

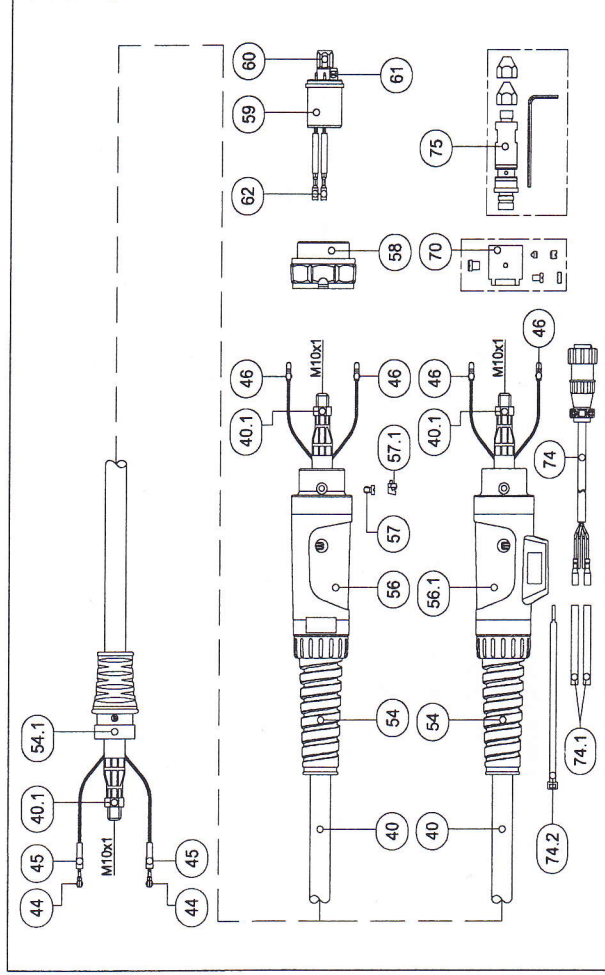

Pos.	Description	Spec.	Part-No.
Cable assembly			
40	Bikox® LW cable assembly, R4 2-pole for 3,0 m		160.H025.1
40	Bikox® LW cable assembly, R4 2-pole for 4,0 m		160.H026.1
40	Bikox® LW cable assembly, R4 2-pole for 4,5 m (15 FT)		160.H380.1
40	Bikox® LW cable assembly, R4 2-pole for 5,0 m		160.H027.1
40.1	Hexagonal nut M10x1	10 pcs	001.0009
44	Cable eye	20 pcs	175.0022
45	Insulating sleeve for cable eye	20 pcs	400.0119
46	Plug	20 pcs	175.0004
54	Cable support D=19		400.1010
54.1	Cable support short for ABIMIG® AT		400.D574.1
56	Cable support machine side cpl. for KZ-2		501.2248
56.1	Connector housing machine side cpl. for UNI-Plug		501.D578.1
57	Cylindrical screw M4x6	20 pcs	000.0552
57.1	Cover 1	20 pcs	500.0251
58	Connecting nut M33x2		500.0213
59	Central plug KZ-2		501.0003
60	Cap nut M10x1, plastic	5 pcs	501.D536.5
61	O-Ring 4x1	20 pcs	165.0002
62	Sleeve	20 pcs	175.0003
70	UNI-Plug M10x1 kpl.		501.D333
74	Control lead with 4-pole Amphenol plug L=400mm		175.D098
74.1	Protection hose 4,5x0,5 L=60mm		110.D023
74.2	Cable binder 4,7x200 black		184.0126
Machine connectors for UNI-Plug			
75	Connector kit Miller® for Bikox M10x1		501.D688.1
no pic.	Connector kit Lincoln® LN for Bikox M10x1		501.D670.1
no pic.	Connector kit Lincoln® LN10 for Bikox M10x1		501.D672.1
no pic.	Connector kit HOBART®/TWECO® for Bikox M10x1		501.D674.1

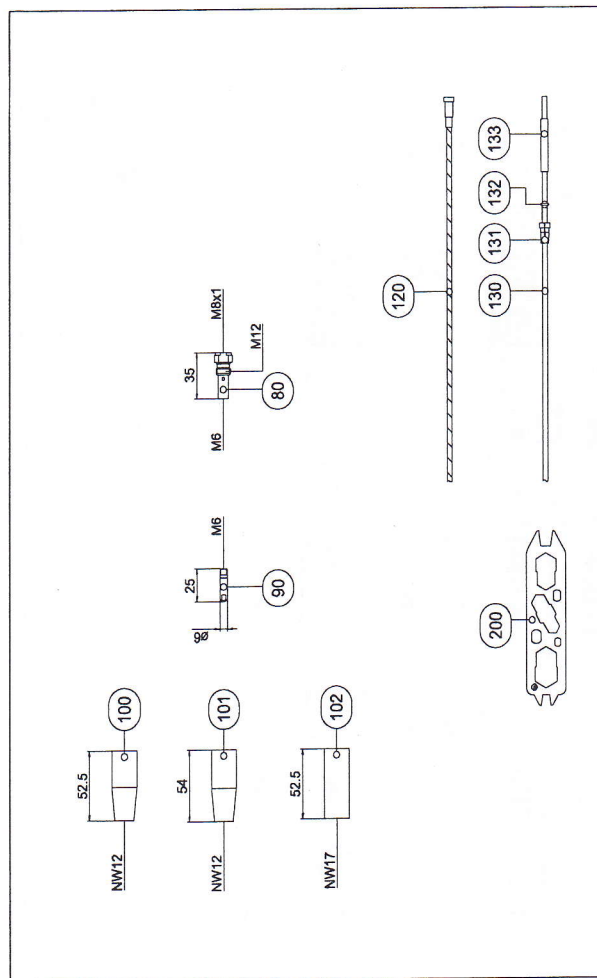

Pos.	Description	Spec.	Part-No.
no pic	Connector kit Panasonic® for BikoX M10x1		501 D676.1
Consumables			
80	Tip holder M12 M6 L38 M8x1	5 pcs	006 D835.5
90	Contact tip M6 E-Cu; Ø 0,6 (6x25)	10 pcs	140 D010
90	Contact tip M6 E-Cu; Ø 0,8 (6x25)	10 pcs	140 D011
90	Contact tip M6 E-Cu; Ø 1,0 (6x25)	10 pcs	140 D012
100	Gas nozzle M12; NW 12 galvanized; conical L=52mm	5 pcs	145 D001
101	Gas nozzle M12; NW 12 galvanized; conical L=54mm	5 pcs	145 D004
102	Gas nozzle M12; NW 17 galvanized; cylindrical L=52mm	5 pcs	145 D003
110	Neck liner 1,5 for wireØ 0,6-1,0; L=265mm		122 D037
110	Neck liner 1,6 brass for wireØ 0,6-1,0; L=265mm		122 D040
120	Torch liner insulated; 1,5/4,5; blue; wireØ 0,6 - 0,8; for 3,0 m		124 D011
120	Torch liner insulated; 1,5/4,5; blue; wireØ 0,6 - 0,8; for 4,0 m		124 D012
120	Torch liner insulated; 1,5/4,5; blue; wireØ 0,6 - 0,8; for 5,0 m		124 D015
120	Torch liner insulated; 2,0/4,5; red; wireØ 1,0 - 1,2; for 3,0 m		124 D026
120	Torch liner insulated; 2,0/4,5; red; wireØ 1,0 - 1,2; for 4,0 m		124 D031
120	Torch liner insulated; 2,0/4,5; red; wireØ 1,0 - 1,2; for 5,0 m		124 D035
130	PTFE liner 1,5/4,0; blue; wireØ 0,8 - 1,0; for 3,0 m		126 D005
130	PTFE liner 1,5/4,0; blue; wireØ 0,8 - 1,0; for 4,0 m		126 D008
130	PTFE liner 1,5/4,0; blue; wireØ 0,8 - 1,0; for 5,0 m		126 D011
130	PTFE liner 2,0/4,0; red; wireØ 1,0 - 1,2; for 3,0 m		126 D021
130	PTFE liner 2,0/4,0; red; wireØ 1,0 - 1,2; for 4,0 m		126 D026
130	PTFE liner 2,0/4,0; red; wireØ 1,0 - 1,2; for 5,0 m		126 D028
130	Carbon PTFE liner 1,5/4,0; wireØ 0,8 - 1,0; for 3,0 m		127 D002
130	Carbon PTFE liner 1,5/4,0; wireØ 0,8 - 1,0; for 4,0 m		127 D003
130	Carbon PTFE liner 1,5/4,0; wireØ 0,8 - 1,0; for 5,0 m		127 D004
130	Carbon PTFE liner 2,0/4,0; wireØ 1,0 - 1,2; for 3,0 m		127 D005
130	Carbon PTFE liner 2,0/4,0; wireØ 1,0 - 1,2; for 4,0 m		127 D007
130	Carbon PTFE liner 2,0/4,0; wireØ 1,0 - 1,2; for 5,0 m		127 D008

Pos.	Description	Spec.	Part-No.
131	Nipple for PTFE liner with outer diameter 4,0	20 pcs	131.0001
132	O-Ring 3,5x1,5	20 pcs	165.0008
133	Guiding tube for PTFE liner up to outer diameter 4,0 (200 mm)		129.0461
200	Spanner for ABIMIG®		191.D045
•	Standard equipment		