

A

B

C






D

A

B

C

D

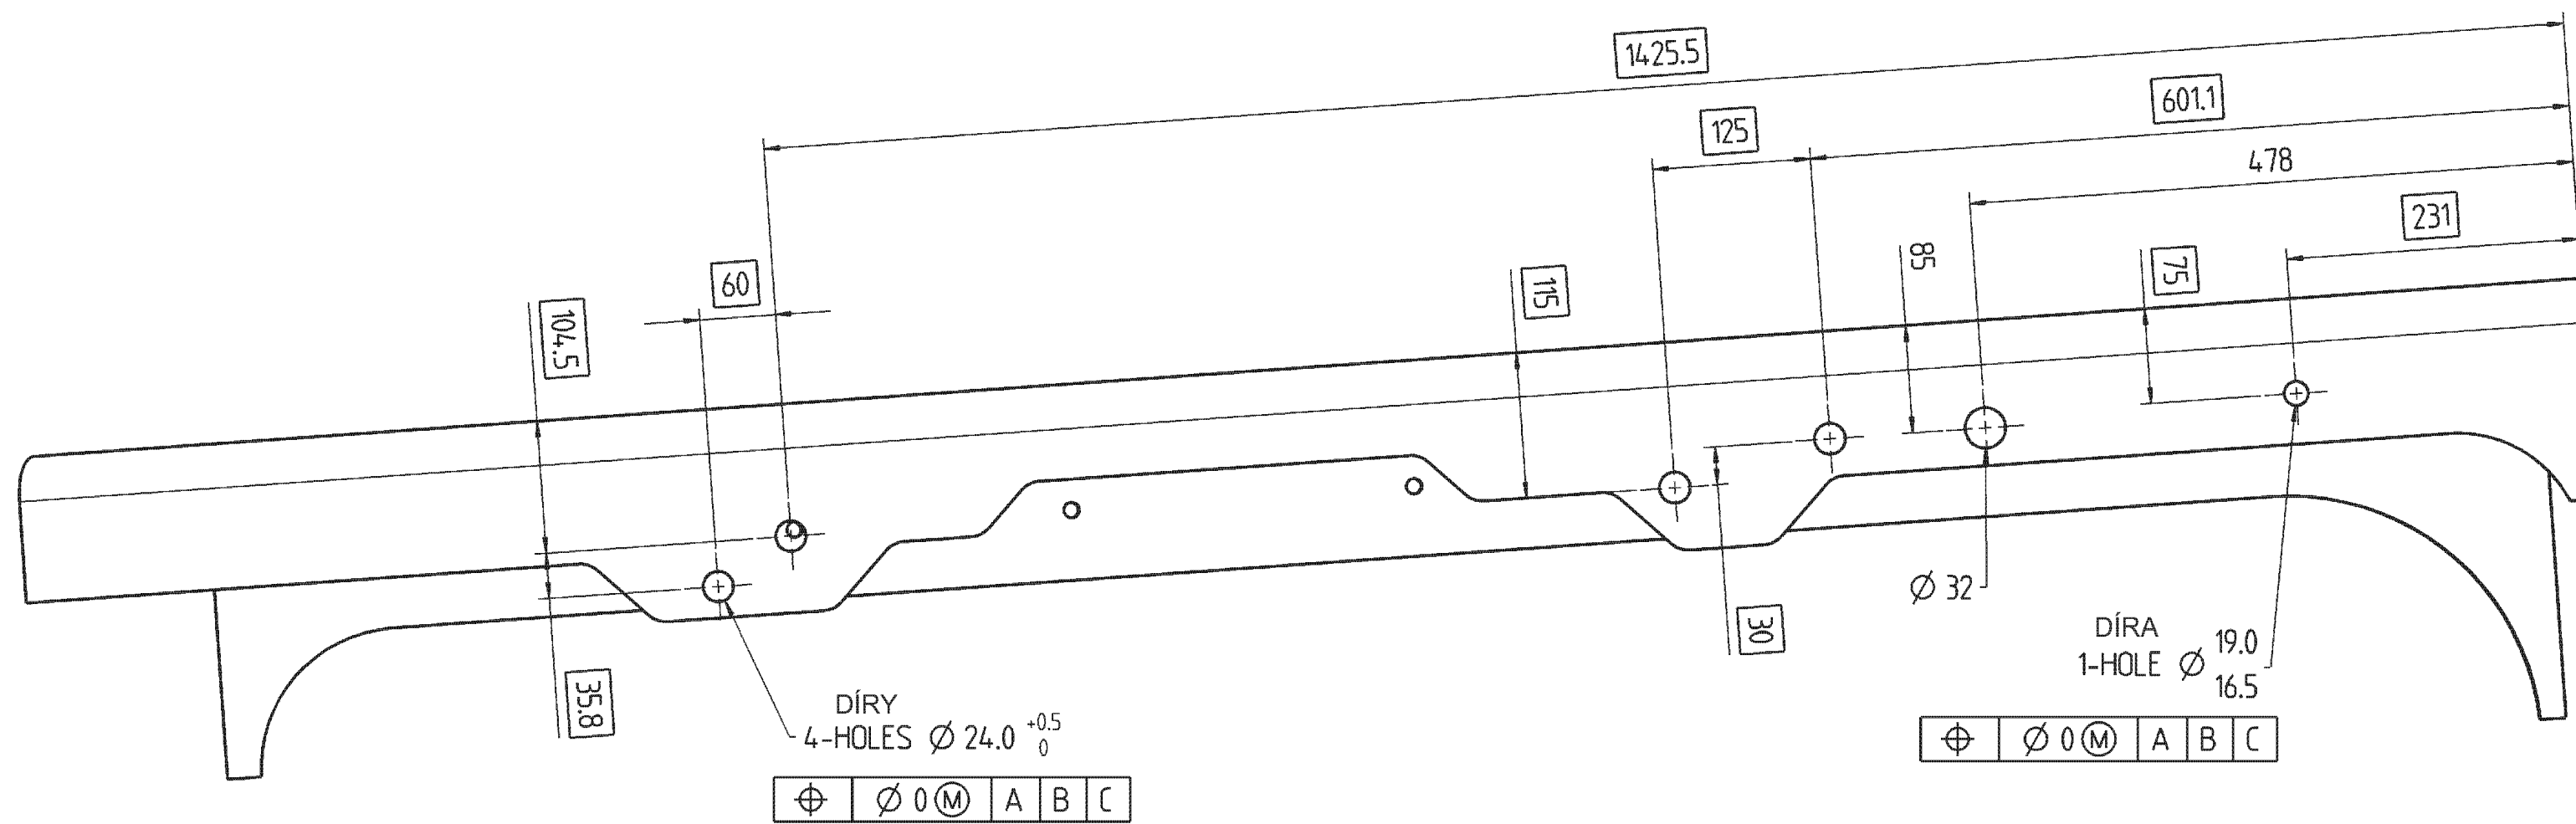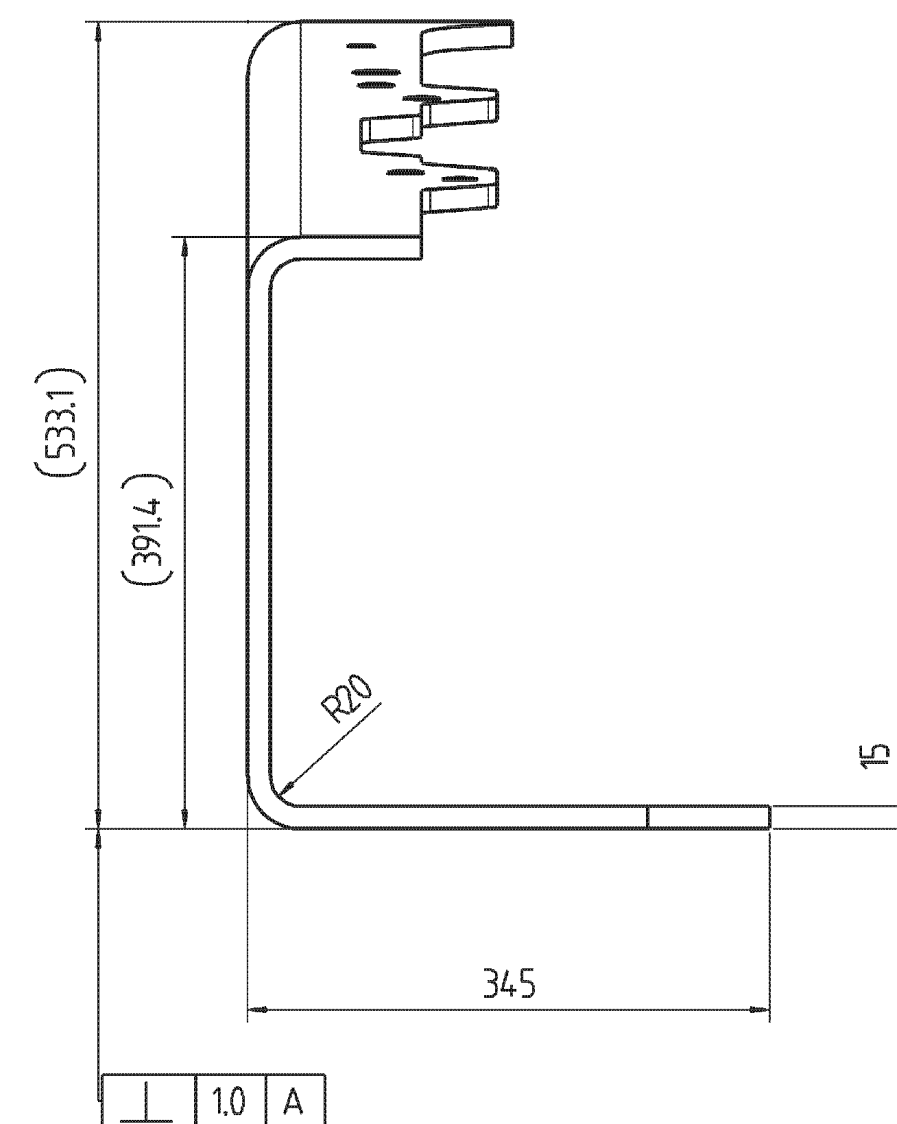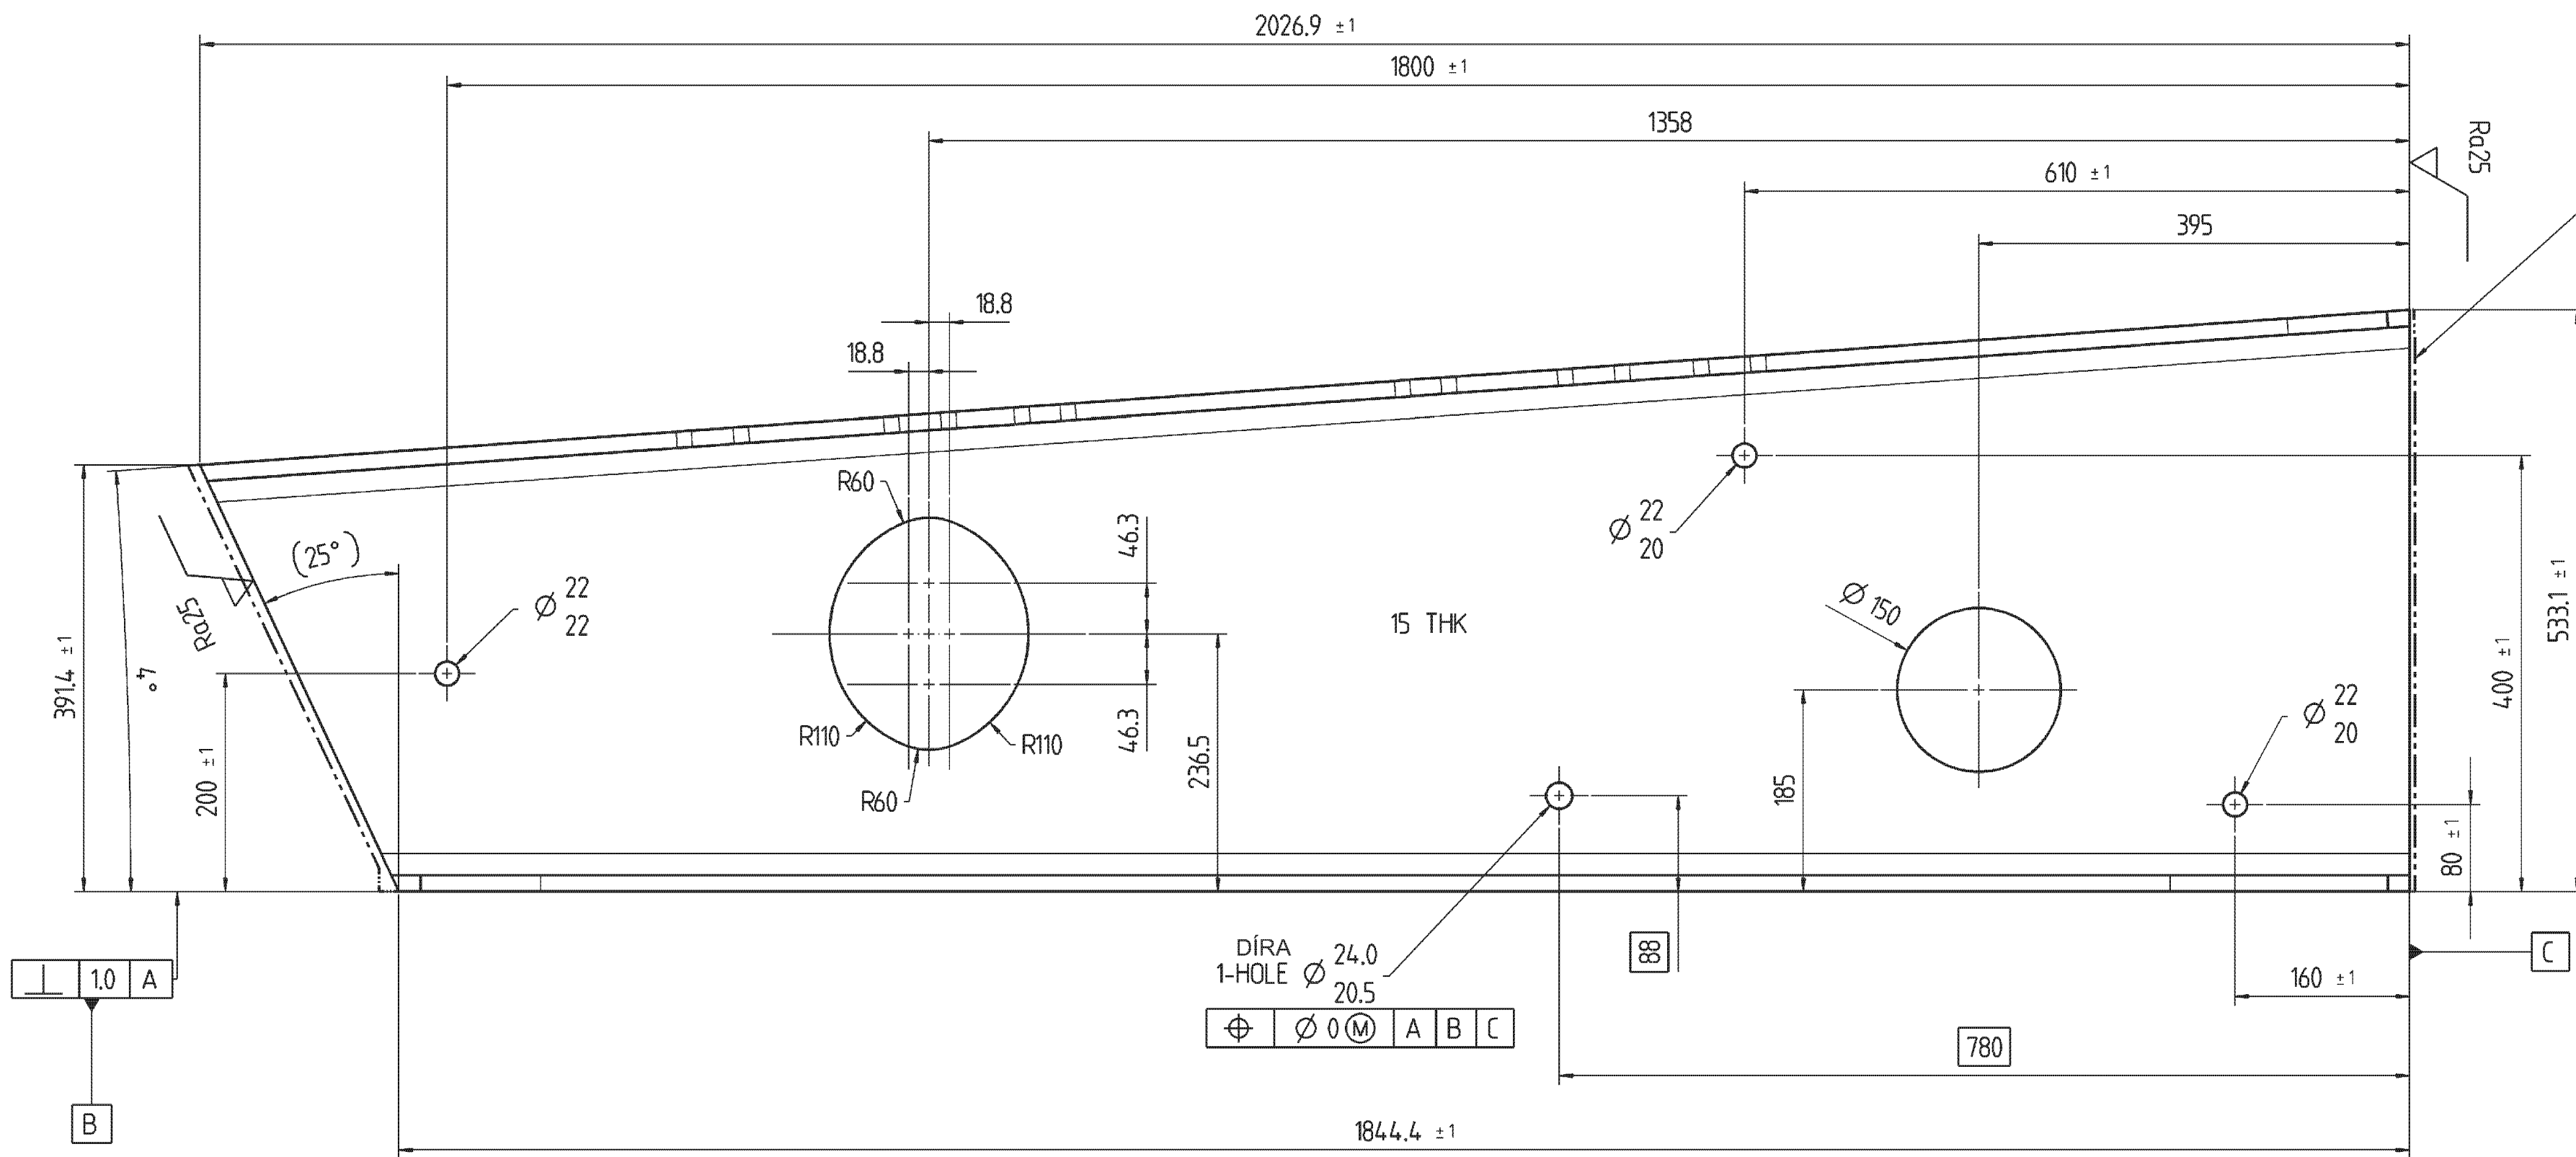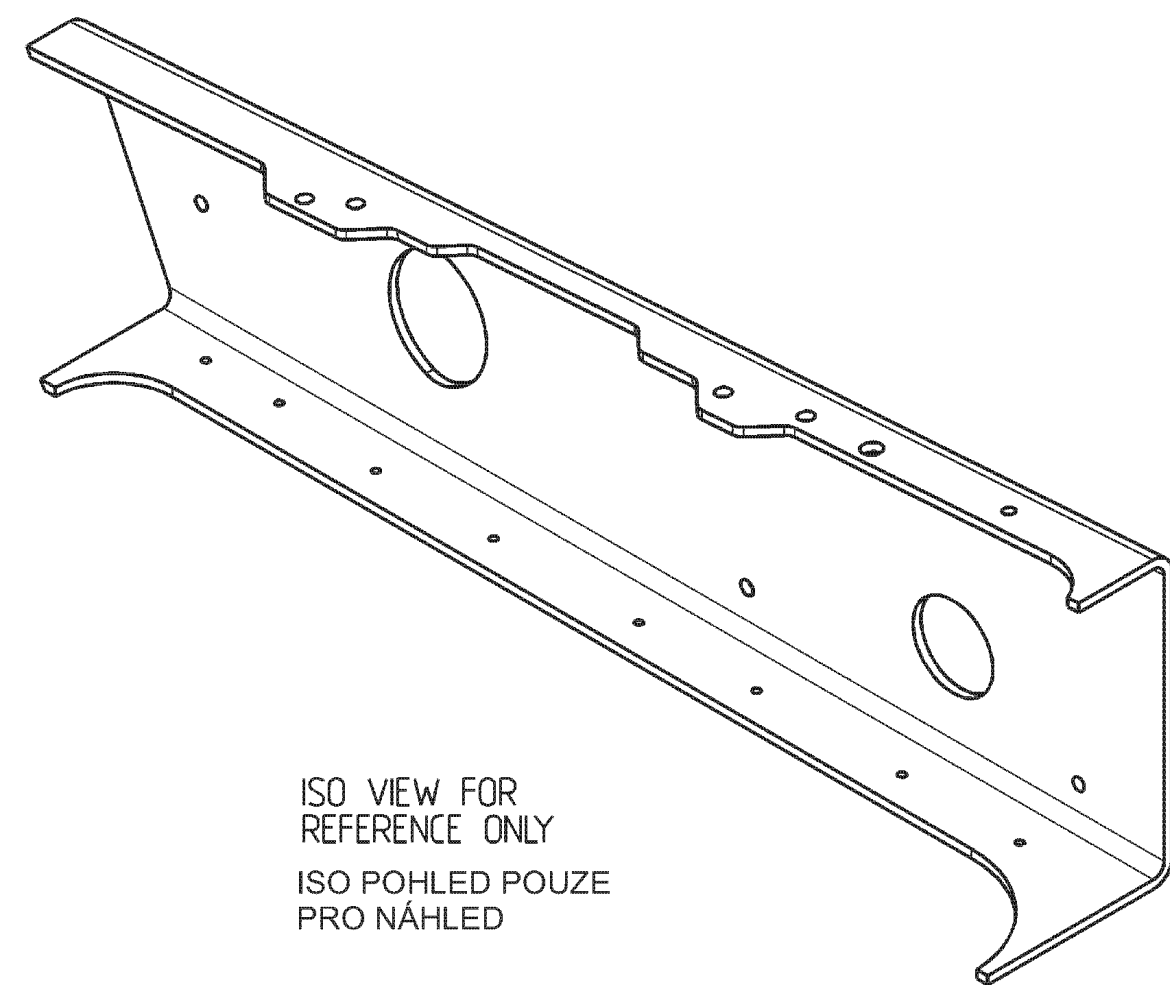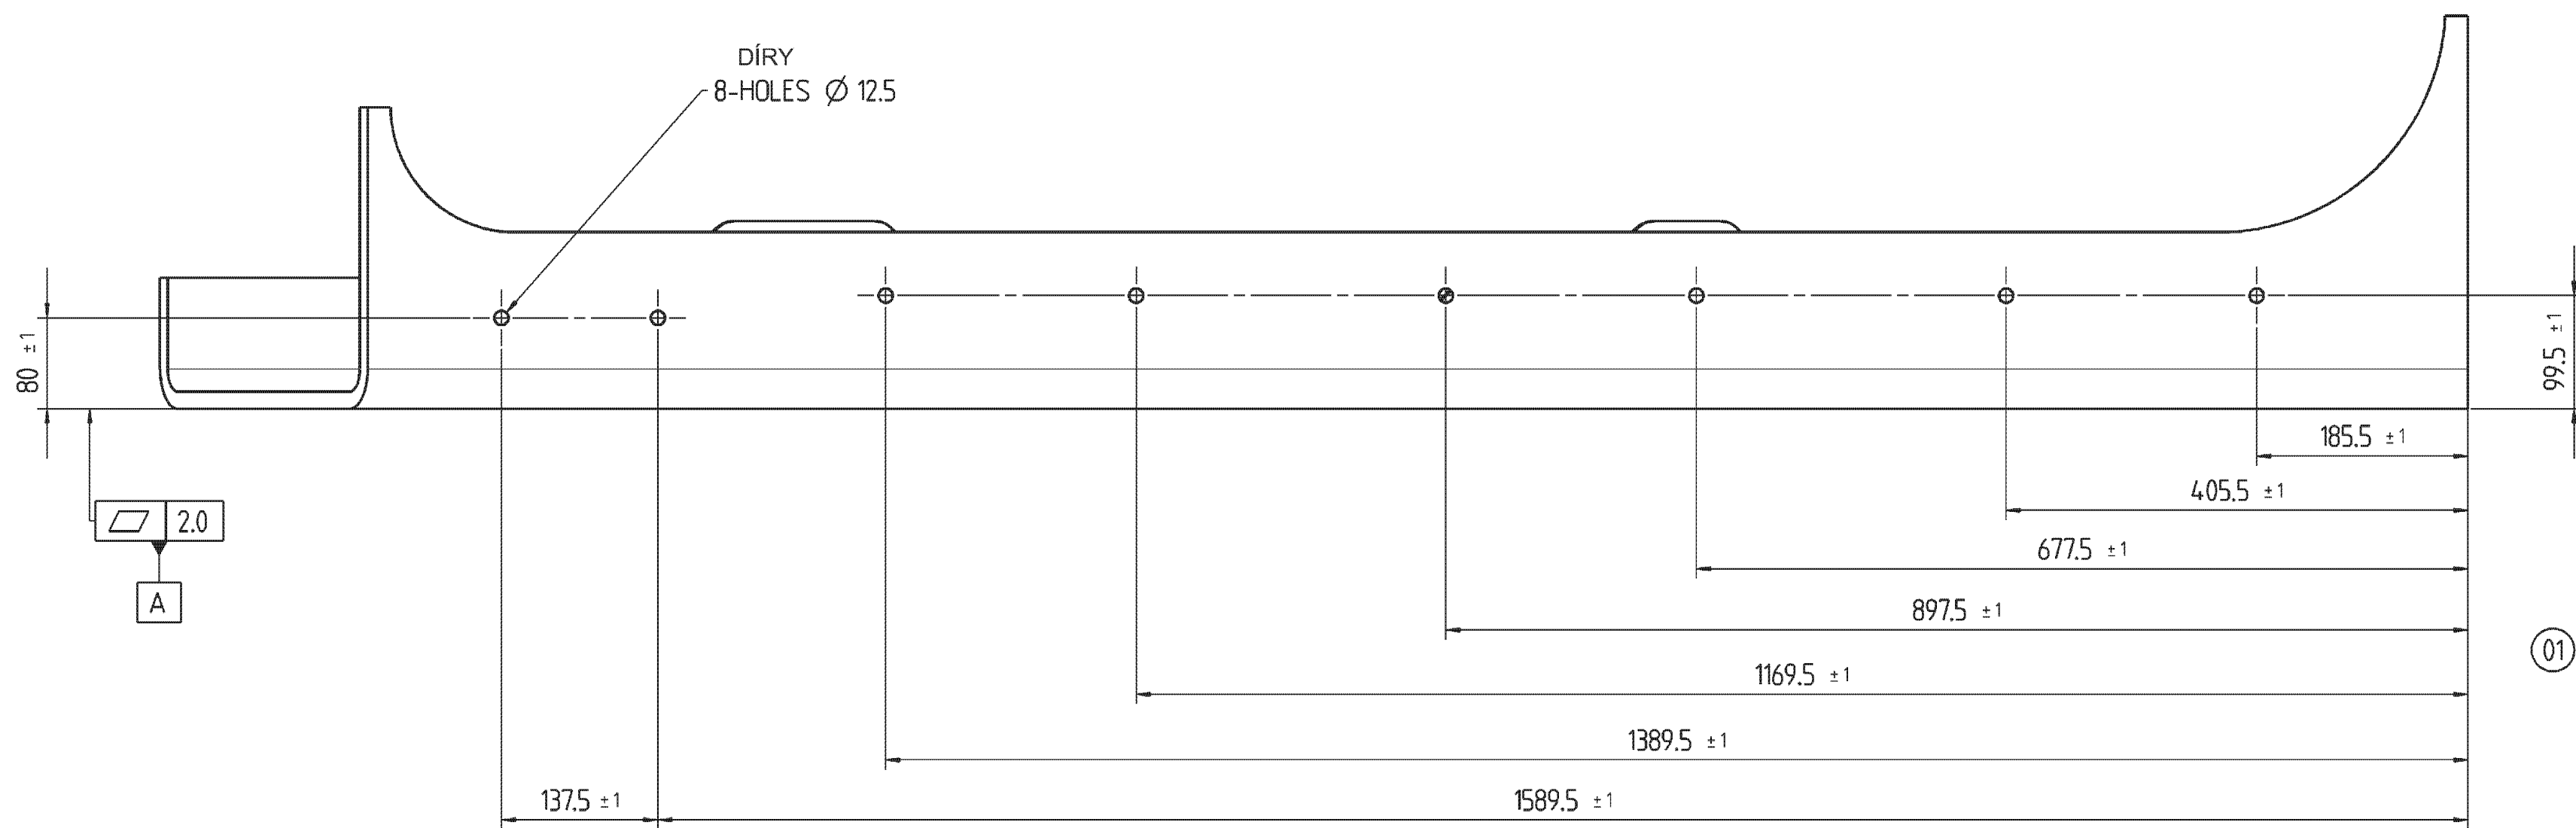

TRUE VIEW ON TOP FLANGE
REALNÝ POHLED NA HORNÍ PLOCHU PŘÍRUBY

Stav v čase dodání	
Odkujení (stupeň čistoty SA 2 1/2 podle ISO 8501-1)	...
bez ořezů podle WN 11310	X
Přípustná horní mez během řezání plamenem (také kladná kulička podle WN 10 572)	...
Bez oleje / bez mastnoty	X
Naležovaný	...
Přípustné olejování	...
Alternativně určit stav v čase dodání pomocí X	...

Condition at time of delivery	
de-scaled (degree of purity SA 2 1/2 acc. ISO 8501-1)	...
without burrs acc. WN 11310	X
Permissible top-end rounding during flame cutting (also positive bead acc. WN 10572)	...
oil-free / free of grease	X
oiled	...
oiling permissible	...
alternatively identify condition at time of delivery with an X	...

First angle projection	
General Tolerance (GT) in mm	...
Size range	...
GT coarse	...
Lengths (L) and angle (L/2) = ±GT	...
Tolerance Symbols ISO 1101	...
roundness	...
straightness/flatness	...
concentricity/run out	...
symmetry	...
parallelism	...
position	...
Languages: en	...

Stav byl RFQ
Přidaná tabulka pro Stav v čase dodání. Změna tolerancí průměrů. Přidaná poznámka na ochranu proti korozi.
Ochrana proti korozi WN 12 480 - Klasifikace

01 RUST PROTECTION WN 12 480 - GRADE 3F

01 State was RFQ		135611	
Added Table Condition at Time of Delivery. Changed Tolerance of
dims. Added Note for rust protection.
Index	...	alteration	...
Change no	...	Fit	...
Toler.
Inspection dim.	...	Material:	EN 10025 S355J0
Auxiliary dim.	...	Blank no:	...
Date	...	Name	...
Drawn	12.12.2012	Checked	12.12.2012
Auth'd	12.12.2012	Mcheck	12.12.2012
Blank number
14014012911
Confidential document	...	Refer to protection notice ISO 8006	...
Released	...	14014012911d001	...