
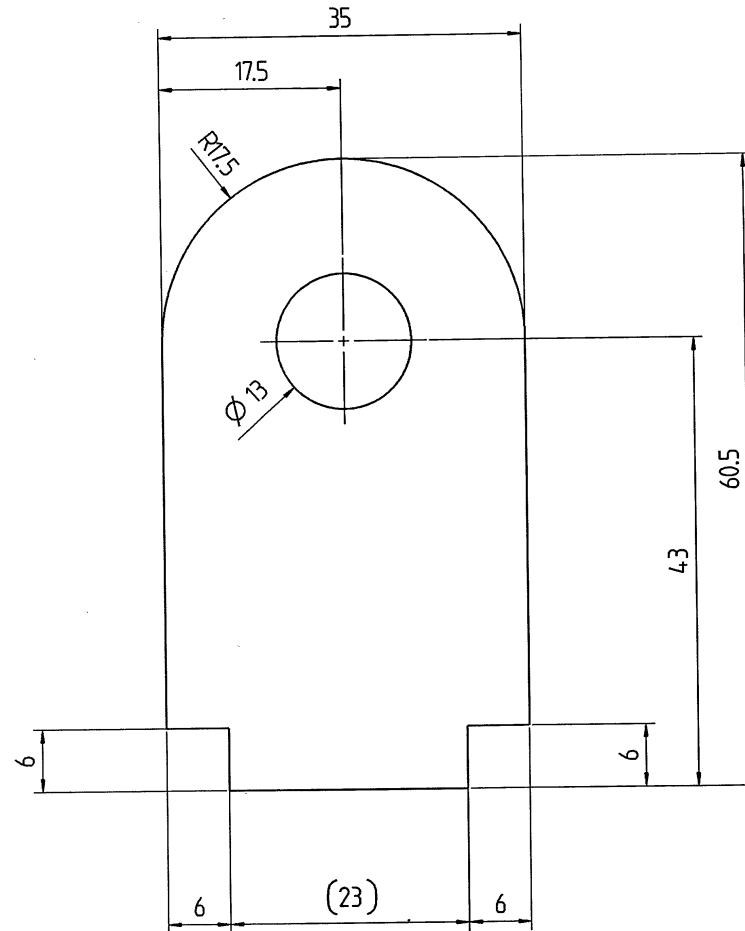


# PŘEKLAD

dn: 28-04-2016

PROVEDLA  
JANA PROKEŠOVÁ

5 THK



28-04-2016

ARCHIV

0

HM/16/00481

JTAV BYL RFQ

PODMÍNKY V ČASE DODÁNÍ

Condition at time of delivery

de-scaled (degree of purity SA 2 1/2 acc. ISO 8501-1)	--
without burrs acc. WN 11310	X
Permissible top-end rounding during flame cutting (also positive bead acc. WN 10572)	--
oil-free / free of grease	X
oiled	--
oiling permissible	--
alternatively identify condition at time of delivery with an X	

BEZ OTŘEPŮ -

ODMAŠŤENÝ -

First angle projection	01	State was RFQ	T46783		
General tolerance (GT) in mm	alteration				
Size range	Index	Inspection dim.	Auxiliary dim.	Change no	Fit
≤ 30	> 30	> 120	> 400	> 1000	
≤ 30	≤ 120	≤ 400	≤ 1000		
GT coarse	Date	Name	Material: S235JR	Weight: in kg	
L 1 2 3 4	13.9.2012	B.Thomas	Blank no:	0.06	
≤ 1 2 4 6	Checked 17.1.2013	N.Sutton	Title:		
Lengths (L) and angle (L/L) = ± GT	Authd 30.1.2013	W.Edmunds	plate		PROD.
Tolerance Symbols ISO 1101	Mcheck 13.2.2013	D.Thomas	Plate - Cover Tab		Scale
○ roundness = 1/20-Tol.					2:1
□ straightness/flatness = GT					1:1
⊙ concentricity/run out = GT					Sheet:
≡ symmetry = GT					1
// parallelism = GT					of:
⊕ position = GT					1
Languages: en	Confidential document	Refer to protection notice ISO 16016	Repl.	Orig.	

Released

14015811943d001

A3